

Spectroradiometer

PS-100, PS-200, PS-300



www.apogeeinstruments.com

435.792.4700



Evaluate radiation spectra

- Measures radiation spectra in relative, energy (Watts), or quantity units (moles) and reflected and transmitted spectra
- Ruggedized fiber-optic spectroradiometers
- Designed for portability in a rugged aluminum enclosure without moving parts
- Apogee exclusive cosine-corrected detector accurately measures low angle light
- Calibrated measurement ranges from 300 to 1000 nm (NIST traceability) with 1.5 nm resolution
- All-in-one package including software interface and is powered via USB cable from laptop or desktop computer



PS-100: Visible to Near Infrared Range



PS-200: UV to Visible Range
PS-300: UV to Near Infrared Range

SPECIFICATIONS

Wavelength Sensitivity:

PS-100: 350 to 1150 nm

PS-200: 190 to 850 nm

PS-300: 220 to 1100 nm

Irradiance Calibration Range:

PS-100: 350 to 1000 nm

PS-200: 300 to 850 nm

PS-300: 300 to 1000 nm

Wavelength Resolutions:

PS-100: 1.6 nm (full width, half maximum)

PS-200: 1.5 nm (full width, half maximum)

PS-300: 2.0 nm (full width, half maximum)

Detector Type: CCD, 2048 pixel (14 μ m by 200 μ m pixel size)

Digitizer: 16-bit

Signal to Noise Ratio: 1000:1

Stray Light: < 0.1 % at 435 nm; < 0.5% at 600 nm

Measurement Repeatability: < 1 %

Calibration Uncertainty: $\pm$ 5 % (for irradiance calibration)

Integration Time Range: 1 ms to 65 s

Field of View: Cosine-corrected detector: 180°

Fiber optic cable: 30°

Directional (Cosine) Response: $\pm$ 4 % at 80° zenith angle

Operating Environment: 0 to 60 C

Power Requirement: 5 V DC with a nominal current draw of
100 mA via USB

Dimensions: PS-100: 12.5 cm length, 7.5 cm width, 2.5 cm height
PS-200, PS-300: 15.0 cm length, 10.0 cm width,
6.9 cm height

Mass: PS-100: 500 g

PS-200, PS-300: 900 g


Cable: 2 m of armored, 600 μ m diameter single strand, multi-mode fiber
optic cable



AS-003: Reflectance Probe



AS-004: Reflectance Standard

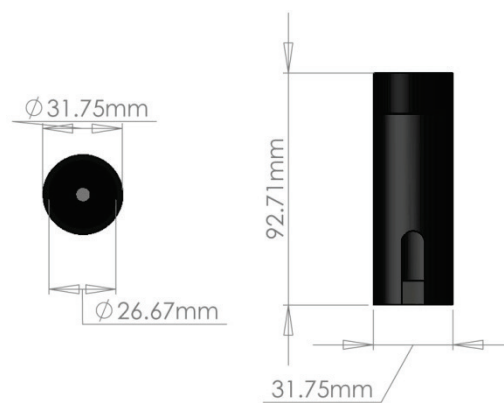

Diffusion Head Dimensions

APOGEE INSTRUMENTS, INC. 721 WEST 1800 NORTH, LOGAN, UTAH 84321, USA
TEL: (435) 792-4700 | FAX: (435) 787-8268 | WEB: APOGEEINSTRUMENTS.COM

Copyright © 2013 Apogee Instruments, Inc.